

CHARGER INSTRUCTIONS (PREVIOUS DESIGN)

This is a supplemental manual and for reference only. Always read and understand the primary product manual before operating.

Plug the charger's 2-prong plug into a 110-120V AC outlet.

Remove the battery from the unit and charge in a fireproof location. Insert the white connector into the charger's 4-pin socket as shown, aligning the raised ridges on the connector with the socket (Figure 1).



**READ THE WARNINGS ON PAGE 4
REGARDING LITHIUM BATTERIES.**

The LEDs on the charger should become steady red (Figure 2). The battery is now charging. The first charge may take much longer than usual due to initial cell balancing. The lights will become steady green once charging is complete. At that time, carefully disconnect the battery and unplug the charger from the outlet. Do not damage the wires or a short may occur.

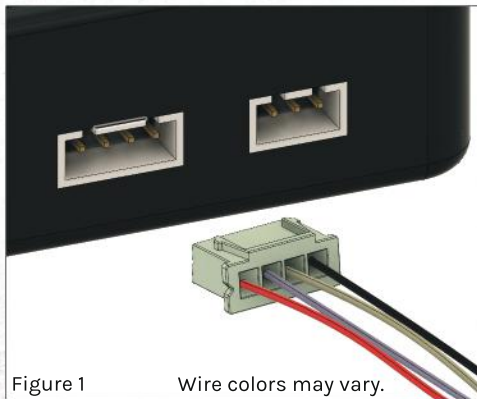


Figure 1

Wire colors may vary.



Figure 2